



# FR3 AAA

Lithium Iron Disulfide  
(Li-FeS<sub>2</sub>) Batteries

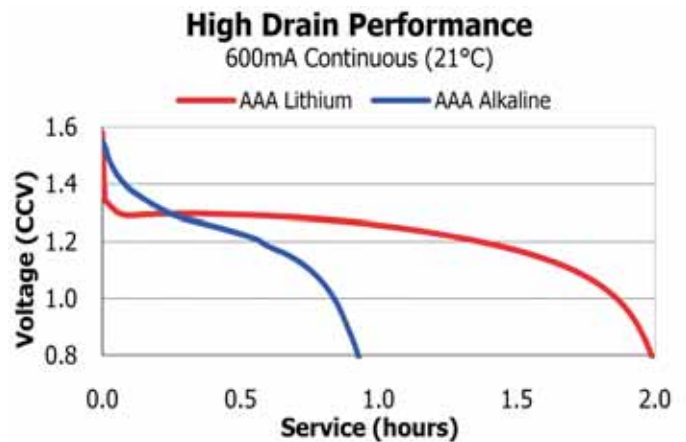


Nominal capacity (350mA, 0.8V off)	1100mAh
Nominal voltage	1.5V
Max. constant current	1000mA
Max. pulse current	1500mA
Operating temperature	-40~+60°C
Weight	8.0g

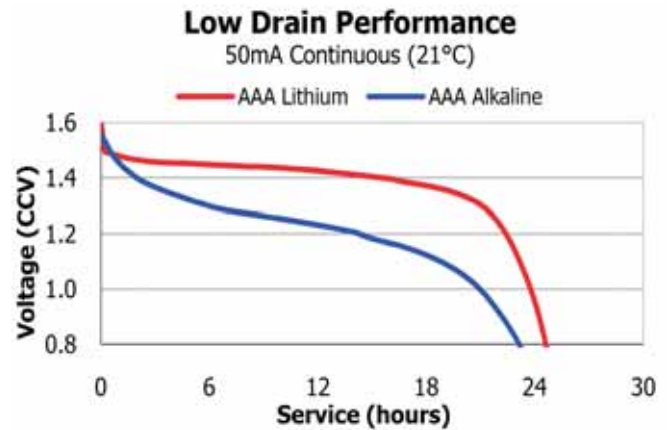

## Constant Current Performance

Typical Characteristics to 1.0 Volts (21°C)

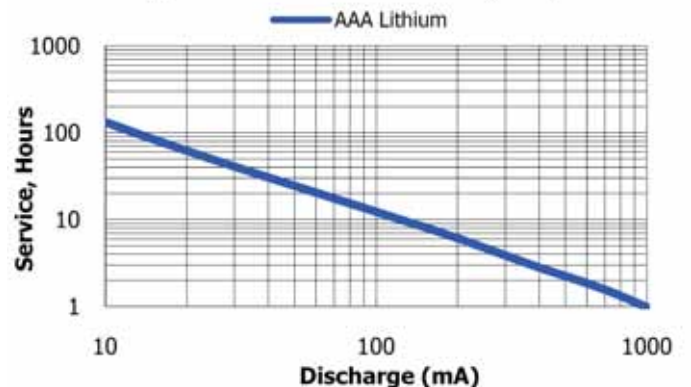

## WARNING

- Do not short-circuit between "+" and "-" terminals.
- Do not charge, damage the battery or throw it into fire.
- Do not solder directly on the battery. Please use wire or nickel sheet by spot welding.
- Take out the battery when discharged to cut-off voltage, and dispose of according to the national and local laws.

EVE ENERGY CO., LTD.

Address.: EVE Industrial Park, XiKeng Industrial zone, Huihuan Town, Huizhou, Guangdong, China

Operator: (86-752)260 6966 Direct: (86-752)260 5822

Fax: (86-752)260 6033 P.C.516006

<http://www.evebattery.com> Email: [sales@evebattery.com](mailto:sales@evebattery.com)

Latest version can be downloaded from the EVE web site

FR3 AAA 2010.05